





Itemno:TB17

Operating Voltage:AC 110V/220V/240V 50~60Hz

Power Consumption:2.5V

Contact Capacity:AC220V 16A

Contact Resistance: $\leq 50M\Omega$

Inaulation Resistance: $\geq 100\Omega$

Operating Temperature:-40°C~+55°C

Accuracy: $\leq 2S/\text{天}25^{\circ}\text{C}$

Contact Capacity:Lamp load:1000W Resistive

load:16A/250VAC( $\cos\phi=1$ )

Inductive Load:3A/250VAC( $\cos\phi=0.6$ )

Working reserve time:24hours charged can lasts 150 hours

Full Timing Range:24h

Stonage Battery:150h

Minimum Setting Unit: 30Minuters

Dimension:123X72X51mm

Weight:260g



Itemno:TB35/TB35R

Operating Voltage: AC 110V/240V

Power Consumption: 2.5V

Contact Capacity: AC220V 20A

Contact Resistance:  $\leq 50M\Omega$

Inaulation Resistance:  $\geq 100\Omega$

Operating Temperature:  $-40^{\circ}C \sim +55^{\circ}C$

Accuracy:  $\leq 2S/\text{天}25^{\circ}C$

Contact Capacity: Lamp load: 1000W Resistive

load: 16A/250VAC( $\cos\phi = 1$ )

Inductive Load: 3A/250VAC( $\cos\phi = 0.6$ )

Working reserve time: 24hours charged can lasts 150 hours

Full Timing Range: 24h

Minimum Setting Unit: 15Minuters

Setup Times: 15Minuters/time 90Time

Dimension:152X110X46mm

Weight:260g

Installing Mode: DIN rail mounting



Itemno:TB-37

Operating Voltage: AC 110V/220V/240V 50-6Hz

Power Consumption: 2.5W

Contact Capacity: AC220V 16A

Contact Resistance:  $\leq 50\text{M}\Omega$

Insulation Resistance:  $\geq 100\text{M}\Omega$

Operating Temperature:  $-40^{\circ}\text{C}\sim+55^{\circ}\text{C}$

Accuracy:  $\leq 2\text{S}/\text{天}25^{\circ}\text{C}$

Contact Capacity: Lamp load: 1000W Resistive

load: 16A/250VAC( $\cos\phi=1$ )

Inductive Load: 3A/250VAC( $\cos\phi=0.6$ )

Working reserve time: 24hours charged can lasts 150 hours


Full Timing Range: 24h

Minimum Setting Unit: 15Minuters

Storage Battery: 150h

Dimension:72X72X53mm

Weight:260g

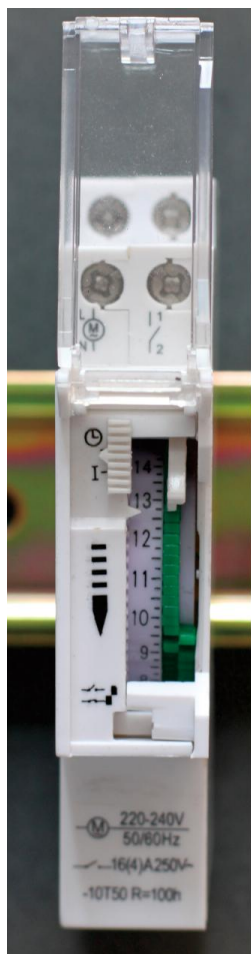

Itemno:TB45 TB-180

Operating Voltage: AC 110V/220V/240V 50-60Hz

Power Consumption: 2.5W

Contact Capacity: AC220V 16A

Contact Resistance:  $\leq 50\text{M}\Omega$

Insulation Resistance:  $\geq 100\text{M}\Omega$

Operating Temperature:  $-25^{\circ}\text{C}\sim+70^{\circ}\text{C}$

Accuracy:  $\leq 2\text{s}/\text{天}25^{\circ}\text{C}$

Contact Capacity: Lamp load: 1000W Resistive

load: 16A/250VAC( $\cos\phi=1$ )

Inductive Load: 3A/250VAC( $\cos\phi=0.6$ )

Working reserve time: 24hours charged can lasts 100 hours

Full Timing Range: 24h

Storage Battery: 150h

Minimum Setting Unit: 15Minuters

Setup Times: 15Minuters/time 96Time

Dimension:45X17.5X60mm

Installing Mode: DIN rail mounting



Item no:TB-388

Operating Voltage: AC 100V/240V 50-60Hz

Power Consumption: 2.5W

Contact Capacity: AC220V 20A

Contact Resistance:  $\leq 50\text{M}\Omega$

Insulation Resistance:  $\geq 100\Omega$

Operating Temperature:  $-20^{\circ}\text{C}\sim+55^{\circ}\text{C}$

Accuracy:  $\leq 2\text{S}/\text{天}25^{\circ}\text{C}$

Contact Capacity: Lamp load: 1000W Resistive

load: 16A/250VAC( $\cos\phi=1$ )

Inductive Load: 3A/250VAC( $\cos\phi=0.6$ )

Working reserve time: 24hours charged can lasts 150 hours

Full Timing Range: 24h

Minimum Setting Unit: 15Minuters

Setup Times: 15Minuters/time 96Time

Dimension:112X83.5X51mm

Weight:260g

Installing Mode: DIN rail mounting



|                        |                    |                        |
|------------------------|--------------------|------------------------|
| Modle NO.              | T50                | AH711                  |
| Rated voltage          | v                  | AC110-240 $\pm$ 10%    |
| Contact type           |                    | 1NA/NC                 |
| contact capacity       |                    |                        |
| resistive load         | [A]                | 16                     |
| inductive load         | [A]                | 3                      |
| Rated frequency        | [Z]                | 50-60                  |
| Time base              |                    | Quartz                 |
| Cycles                 |                    | Daily                  |
| Minimum switching time | [min]              | 20                     |
| Max.programs per cycle |                    | 72                     |
| running reserve        | [h]                | 200                    |
| Power dissipated       | [VA]               | 0,5                    |
| Max.terminal section   | [mm <sup>2</sup> ] | 1...6                  |
| Mounting               |                    | on DIN rail/wall/panel |
| Working temperature    | [°C]               | -10...+50              |
| Ambient temperature    | [°C]               | -20...+60              |
| Standards              |                    | EN60730                |



Item no:TB-330/TB-330R

Operating Voltage: AC 100V/240V 50-60HZ

Power Consumption: 2.5V

Contact Capacity: AC250V **30A**

Contact Resistance:  $\leq 50M\Omega$

Inaulation Resistance:  $\geq 100\Omega$

Operating Temperature:  $-40^{\circ}C \sim +55^{\circ}C$

Accuracy:  $\leq 2S/\text{天}25^{\circ}C$

Contact Capacity: Lamp load: 1000W Resistive

load: 16A/250VAC( $\cos\phi = 1$ )

Inductive Load: 3A/250VAC( $\cos\phi = 0.6$ )

Working reserve time: 24hours charged can lasts 150 hours

Full Timing Range: 24h

Minimum Setting Unit: 30Minuters

Setup Times: 15Minuters/time 48Time

Dimension:188X130X55mm



Type:TS18

Rated Voltage: 100-240VAC

Frequency:50HZ/60HZ

Power Consumption:1.5W

Driving Method:Quartz controlled s stepping motor

Power compensation time:150hours

Installation: Guided rail

Load Capacity:16A 250VAC

Minimum Time-set Interval:30minutes

Ambient Temperature:-10°C~+50°C

Ambient Humidity:below85%

Size:90x54x65.5mm



Itemno:TB-72

Operating Voltage:AC 110V/220V/240V 50~60Hz

Power Consumption:2.5V

Contact Capacity:AC220V 16A

Contact Resistance: $\leq 50M\Omega$

Insulation Resistance: $\geq 100\Omega$

Operating Temperature:-40°C~+55°C

Accuracy: $\leq 2S/\text{天}25^{\circ}\text{C}$

Contact Capacity:Lamp load:1000W Resistive

load:16A/250VAC( $\cos \phi = 1$ )

Inductive Load:3A/250VAC( $\cos \phi = 0.6$ )

Working reserve time:24hours charged can lasts 150 hours

Full Timing Range:24h

Storage Battery:150h

Minimum Setting Unit: 30Minuters

Dimension:123X72X51mm

Weight:260g



Itemno:TB178

Operating Voltage:AC 110V/220V/240V 50~60Hz

Power Consumption:2.5V

Contact Capacity:AC220V 16A

Contact Resistance: $\leq 50M\Omega$

Insulation Resistance: $\geq 100\Omega$

Operating Temperature:-40°C~+55°C

Accuracy: $\leq 2S/\text{天}25^\circ\text{C}$

Contact Capacity:Lamp load:1000W Resistive

load:16A/250VAC( $\cos \phi = 1$ )

Inductive Load:3A/250VAC( $\cos \phi = 0.6$ )

Working reserve time:24hours charged can lasts 150 hours

Full Timing Range:24h

Storage Battery:150h

Minimum Setting Unit: 30Minuters

Dimension:123X72X51mm

Weight:260g



Item no:TB370

Operating Voltage: AC 100V/240V 50-60Hz

Power Consumption: 2.5V

Contact Capacity: AC220V 20A

Contact Resistance:  $\leq 50M\Omega$

Inaulation Resistance:  $\geq 100\Omega$

Operating Temperature:  $-20^{\circ}\text{C}\sim+55^{\circ}\text{C}$

Accuracy:  $\leq 2\text{S}/\text{天}25^{\circ}\text{C}$

Contact Capacity: Lamp load: 1000W Resistive

load: 16A/250VAC( $\cos = 1$ )

Inductive Load: 3A/250VAC( $\cos = 0.6$ )

Working reserve time: 24hours charged can lasts 150 hours

Full Timing Range: 24h

Minimum Setting Unit: 10Minuters

Setup Times: 10Minuters/time 120Time

Weight:260g

Installing Mode: DIN rail mounting