

MCCB-DC molded case circuit breaker


- Reliable protection at high ambient temperatures
- Loadable:string protection up to
125 size:63A,80A,100A,125A
250 size:160A,200A,225A,250A
400 size:320A,400A
- Tested:Ultimate short circuit breaking capacity Icu of
25kA according to IEC IEC60947-2
- Fast: reclosable for minnum standstill times
- Safe: reliable disconnecter properties,switching under load
- Approval:Provided on pequest



Specifications

Rated Current In (A)	125:63A,80A,100A,125A, 250:160A,200A,225A,250A, 400:320A,400A
Ue Rated operating voltage (VDC)	3P 750V 4P DC1000V
Rated insulation voltage Ui (VDC)	DC1000V
Rated Impact voltage Uimp (kV)	8kV
Ultimate breaking capacity Icu (kV)	25KV
Trip type	Thermal-magnetic
Ambient temperature (°C)	-20°C ~70°C
Altitude	2000M
Installation	Fixed,plug-in
Accessories	Auxiliary,Alarm,Shunt release,Manually operated and electric operation

Wiring diagram

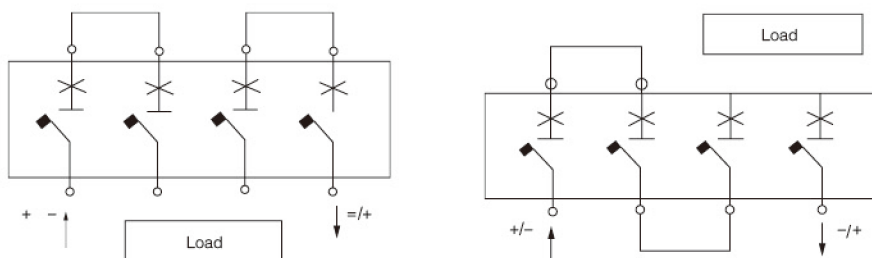

- Protection and Isolation wiring
- The load should be $\leq$ DC1000V

The connection considered for a network in which the middle point of the supply source is earthed, In this case the breaker protects and isolates the load

- Protection and Isolation wiring
- The load should be $\leq$ DC1000V

The Negative pole (-) could be earthed, but in both cases the breaker protects and isolates the load