



Product catalog

Recloser



GEYA ELECTRICAL CO.,LTD

GEYA ELECTRICAL CO.,LTD

Add:Wenzhou Brige Industrial Zone,Beibaixiang Town,
Yueqing,Zhejiang,China 325603

Tel:0086-577-62771036
Fax:0086-577-62711079
Mobile:0086-13567770207
E-mail:sale@cnyeya.com
Web:www.geya.net


2019



ELECTRICAL

CHINA GEYA

We GEYA company are focus on the development of low-voltage electrical with main sprit of research, technology, quality, service, and honesty, we are sticking to the profession road of industrial, making GEYA as one of the most famous brand in the world.

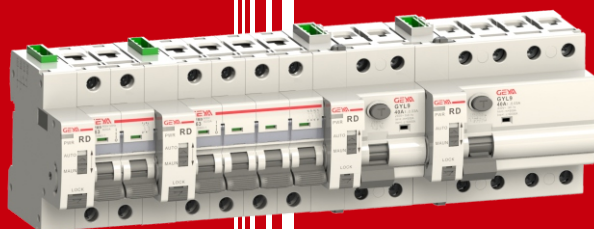

Geya Electrical was established in 2005, and our head office is based in Wenzhou China. Our products are exported to more than 20 countries and regions such as South America, Western Europe, the Middle East, Africa, Australia, South Asia, East Asia, etc

Geya is ISO9001 Quality Assurance accredited and both quality and safety are of paramount importance to us. Our products have SEMKO VDE and CE certificates. Our experience and expertise in modern, innovative product design, vast OEM experience, constant new product development, strong R&D capabilities, competitive prices, excellent international market knowledge, professional dynamic and customer-focused staff, flexible trading terms, quality and timely deliveries.



Introduction

MCB / RCCB controlled by switch




Applications

-Can be widely used in power grid terminal line, such as meter box, new energy circuit management, PV solar control box, smart electricity, smart home, new energy vehicle charging pile, and so on.

Feature

- It can be matched with MCB / RCCB to remotely close and open MCB/RCCB.
- MCB / RCCB controlled by switch, type D has auto reclosing function.
- With manual / automatic selector switch.
- With mechanical / electronic double locking function.
- The shaft transmission mode is more stable and reliable.
- Can match other accessories.
- Work status is indicated by LED.
- 1-MODULE.

Model and connotation

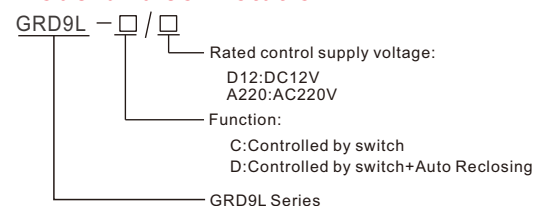

Note: The matching MCB / RCCB specification and model shall be indicated when ordering.
Example 1: GRD9L-S + GYM9 2P C40
Example 2: GRD9L-S + GYL9 2P 40A 30mA


Technical parameters

	GRD9L-C	GRD9L-D
Control mode	Controlled by switch	Controlled by switch+Auto Reclosing
Supply terminals	A1-A2	
Voltage range	DC12V	
Power input	DC max.1W(standby) max.20W(action)	
Voltage range	AC 220V(50-60Hz)	
Supply voltage tolerance	-10%;+10%	
Power input	AC max.1VA(standby) max.20VA(action)	
Supply voltage tolerance	-10%;+10%	
Supply indication	red LED	
Action time	≤1s	
Auto reclosing times	——	3
Auto reclosing time interval	——	10s-60s-300s
Reset the closing times	——	No trip or manual reset within 15 minutes after successful closing
Mechanical life	10000	
Electrical life(AC1)	4000	
Operating temperature	-20℃ to +55℃ (-4℉ to 131℉)	
Storage temperature	-35℃ to +75℃ (-22℉ to 158℉)	
Mounting/DIN rail	Din rail EN/IEC 60715	
Protection degree	IP20	
Operating position	any	
Overvoltage catgory	III.	
Pollution degree	2	
Max.cable size(mm ²)	solid wire max.1×2. 5or 2×1. 5/with sleeve max.1×2. 5 (AWG 12)	
Dimensions	82×18×78mm	
Weight	80g	


Combination with accessories

Auxiliary contact	Yes
Alarm contact	Yes
Shunt release	Yes
Under voltage release	Yes

Panel Diagram

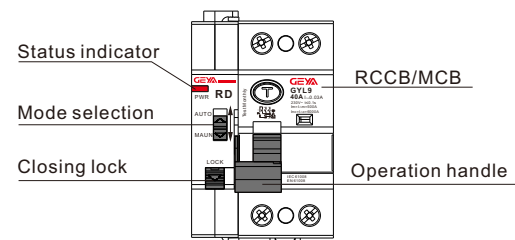


Wiring Diagram




Functions Diagram

GRD9L-C/D

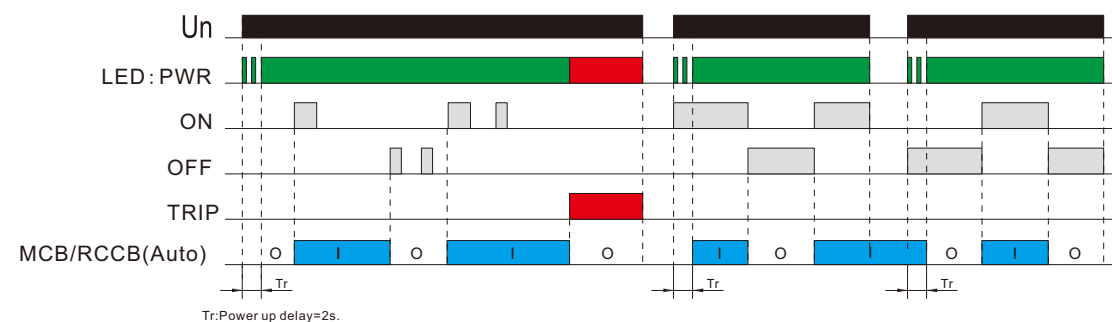


GRD9L-D has automatic closing function, The closing logic is shown in the figure below:

AUTO MODE

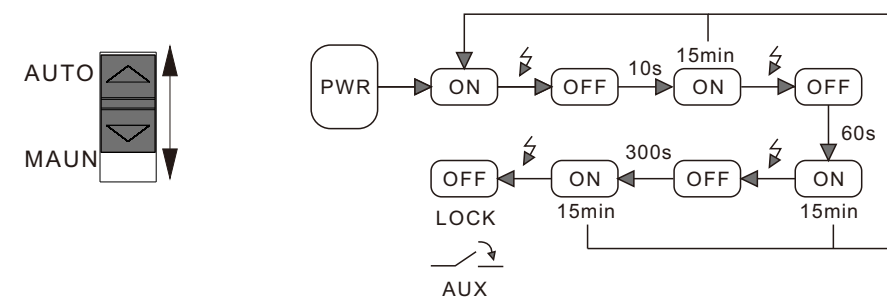

Dimensions(mm)

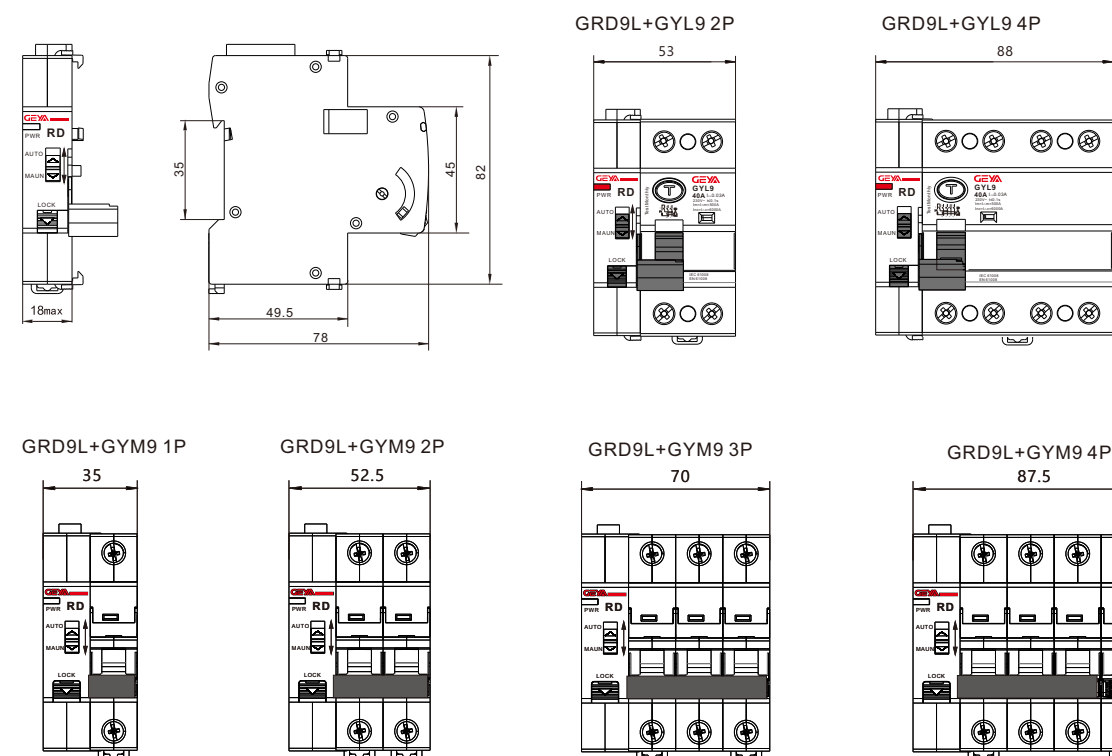




Applications

-Can be widely used in power grid terminal line, such as meter box, new energy circuit management, PV solar control box, smart electricity, smart home, new energy vehicle charging pile, and so on.

Feature

- It can be matched with circuit breaker / leakage protection switch and automatically reclose when MCB / RCCB trips unexpectedly, No need for manual closing, reduce the cost of manual maintenance, and eliminate faults in time to improve efficiency.
- built in 3 reclosing times, continuous closing failure within 15 minutes can send alarm through auxiliary contact.
- With manual / automatic selector switch.
- With mechanical / electronic double locking function.
- The shaft transmission mode is more stable and reliable.
- Can match other accessories.
- Work status is indicated by LED.
- 1-MODULE.

Model and connotation

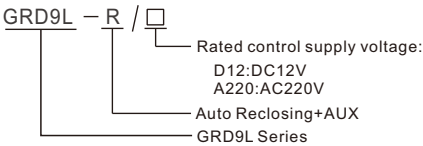

Note: The matching MCB / RCCB specification and model shall be indicated when ordering.
Example 1: GRD9L-R + GYM9 2P C40
Example 2: GRD9L-R + GYL9 2P 40A 30M


Technical parameters

Technical parameters	GRD9L-R
Control mode	Auto Reclosing
Supply terminals	A1-A2
Voltage range	DC12V
Power input	DC max.1W(standby) max.20W(action)
Voltage range	AC 220V(50-60Hz)
Supply voltage tolerance	-10%;+10%
Power input	AC max.1VA(standby) max.20VA(action)
Supply voltage tolerance	-10%;+10%
Supply indication	red LED
Action time	≤1s
Auto reclosing times	3
Auto reclosing interval time	10s-60s-300s
Reset the closing times	No trip or manual reset within 15 minutes after successful closing
Mechanical life	10000
Electrical life(AC1)	4000
Operating temperature	-20℃ to +55℃ (-4℉ to 131℉)
Storage temperature	-35℃ to +75℃ (-22℉ to 158℉)
Mounting/DIN rail	Din rail EN/IEC 60715
Protection degree	IP20
Operating position	any
Overvoltage cathegory	III.
Pollution degree	2
Max.cable size(mm²)	solid wire max.1×2. 5or 2×1. 5/ with sleeve max.1×2. 5(AWG 12)
Dimensions	82×18×78mm
Weight	80g


Combination with accessories

Auxillary contact	Yes
Alarm contact	Yes
Shunt release	Yes
Under voltage release	Yes


Panel Diagram

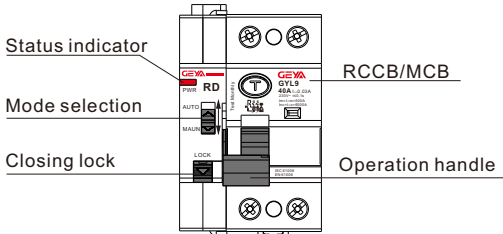


Wiring Diagram



Functions Diagram

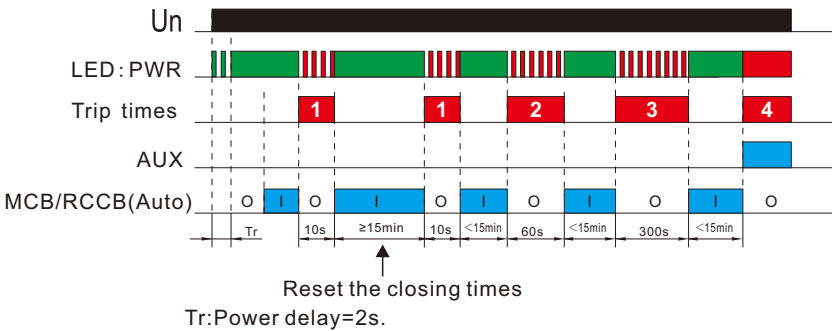


GRD9L-D has automatic closing function, The closing logic is shown in the figure below:

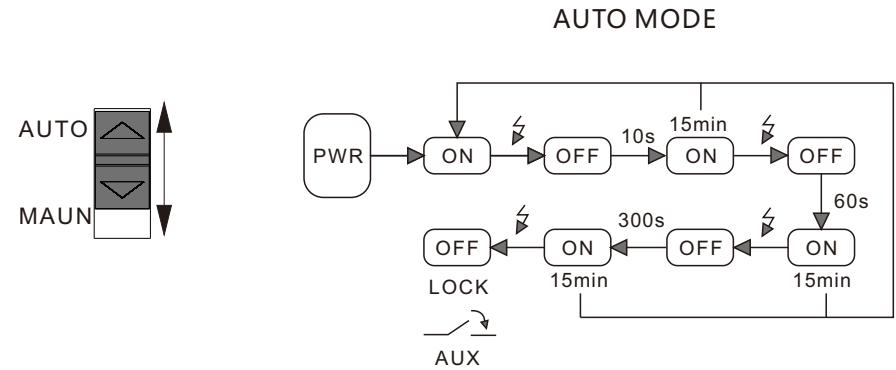

Note: if the closing times and delay time need to be customized, please contact our company.

Dimensions(mm)

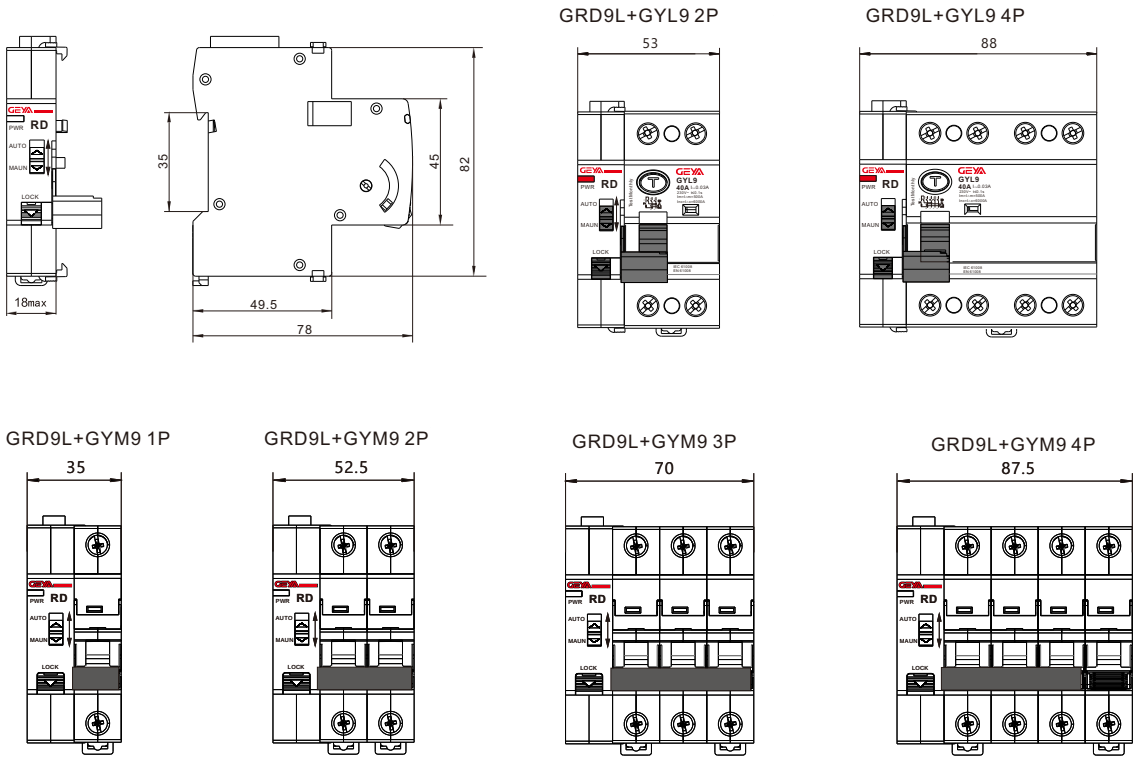




Applications

-Can be widely used in power grid terminal line, such as meter box, new energy circuit management, PV solar control box, smart electricity, smart home, new energy vehicle charging pile, and so on.

Feature

- Can be matched with MCB/RCCB,remote switching and splitting of MCB/RCCB.
- Remote monitoring and control of MCB/RCCB through RS485 interface.
- With manual / automatic selector switch.
- With mechanical / electronic double locking function.
- The shaft transmission mode is more stable and reliable.
- Can match other accessories.
- Work status is indicated by LED.
- 1-MODULE.

Model and connotation

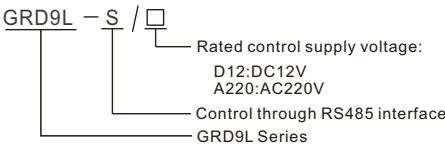

Note: The matching MCB / RCCB specification and model shall be indicated when ordering.
Example 1: GRD9L-S + GYM9 2P C40
Example 2: GRD9L-S + GYL9 2P 40A 30M


Technical parameters

	GRD9L-S
Control mode	RS485
Supply terminals	A1-A2
Voltage range	DC12V
Power input	DC max.1W(standby) max.20W(action)
Voltage range	AC 220V(50-60Hz)
Supply voltage tolerance	-10%;+10%
Power input	AC max.1VA(standby) max.20VA(action)
Supply voltage tolerance	-10%;+10%
Supply indication	red LED
Action time	≤1s
Communication protocol	MODBUS-RTU
Mechanical life	10000
Electrical life(AC1)	4000
Operating temperature	-20℃ to +55℃ (-4℉ to 131℉)
Storage temperature	-35℃ to +75℃ (-22℉ to 158℉)
Mounting/DIN rail	Din rail EN/IEC 60715
Protection degree	IP20
Operating position	any
Overvoltage cathegory	III.
Pollution degree	2
Max.cable size(mm ²)	solid wire max.1×2. 5or2×1. 5/with sleeve max.1×2. 5(AWG 12)
Dimensions	82×18×78mm
Weight	80g


Combination with accessories

Auxillary contact	Yes
Alarm contact	Yes
Shunt release	Yes
Under voltage release	Yes


Panel Diagram

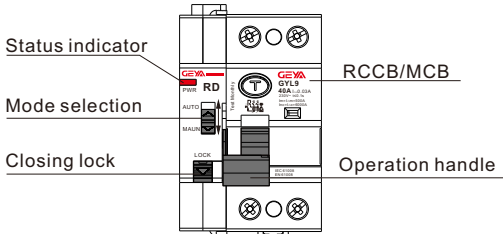

Wiring Diagram




Functions Diagram

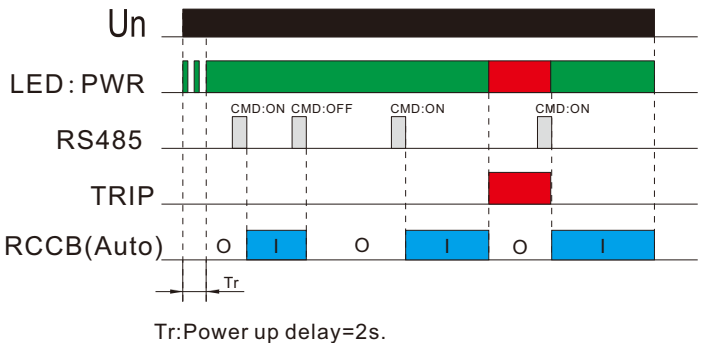


Note: If you need a communication protocol, please contact us.

Dimensions(mm)

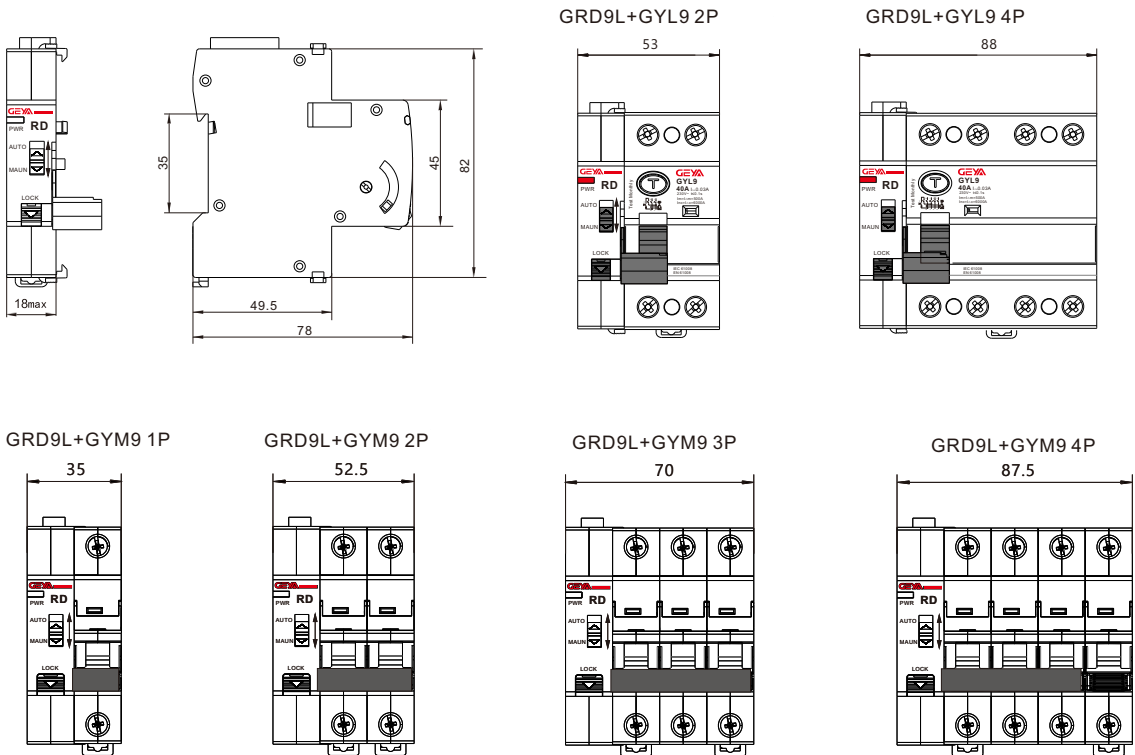


GRD9L-C

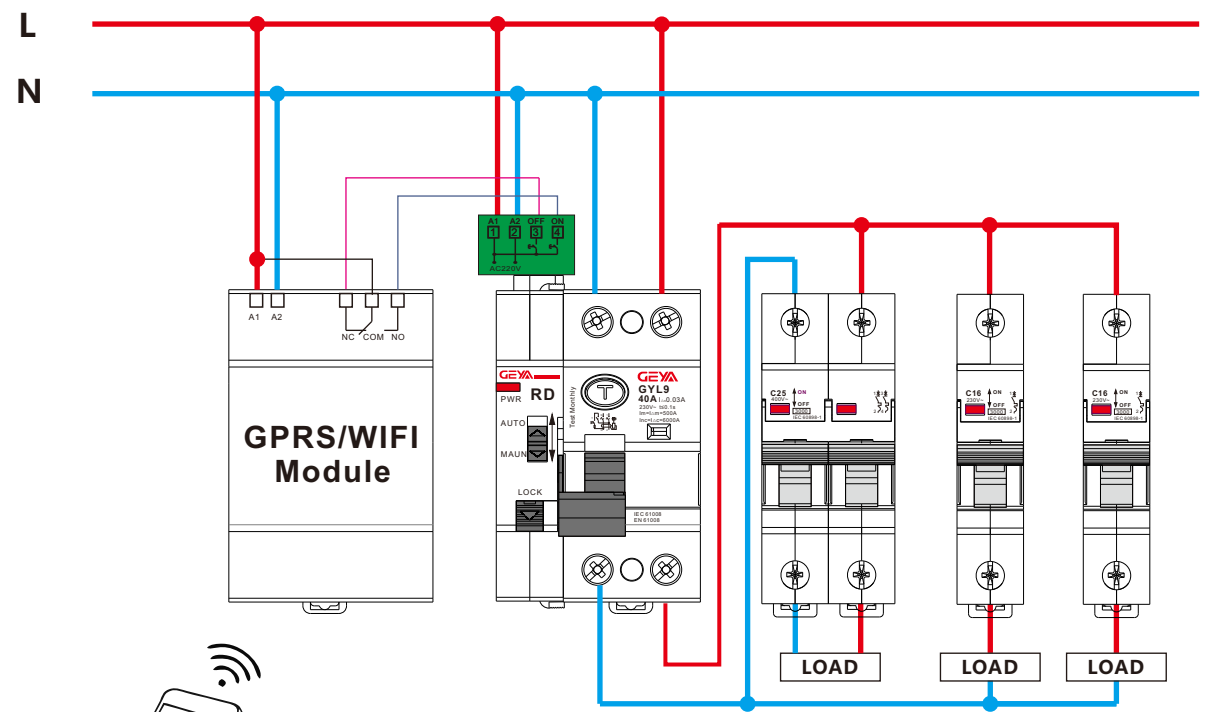


MCB/RCCB can be controlled by remote operation of mobile phone. Of course, MCB/RCCB can also be turned on or off by time control switch.

GRD9L-R

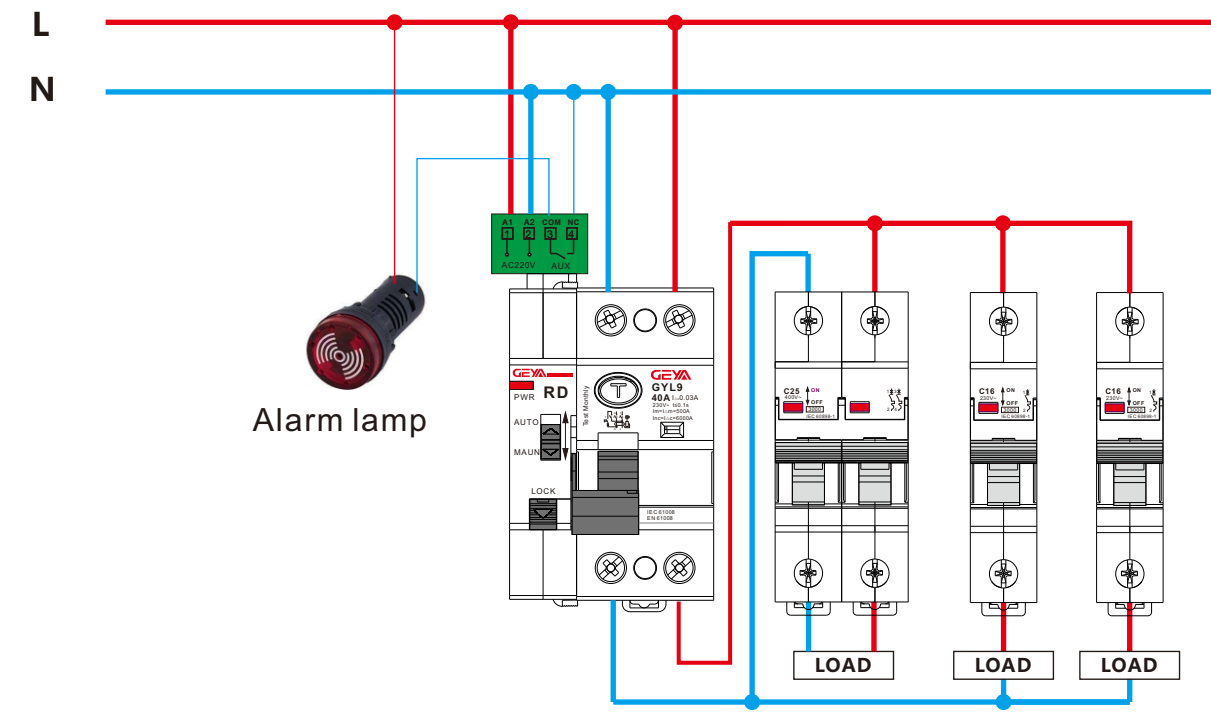

Alarm lamp



GRD9L-S

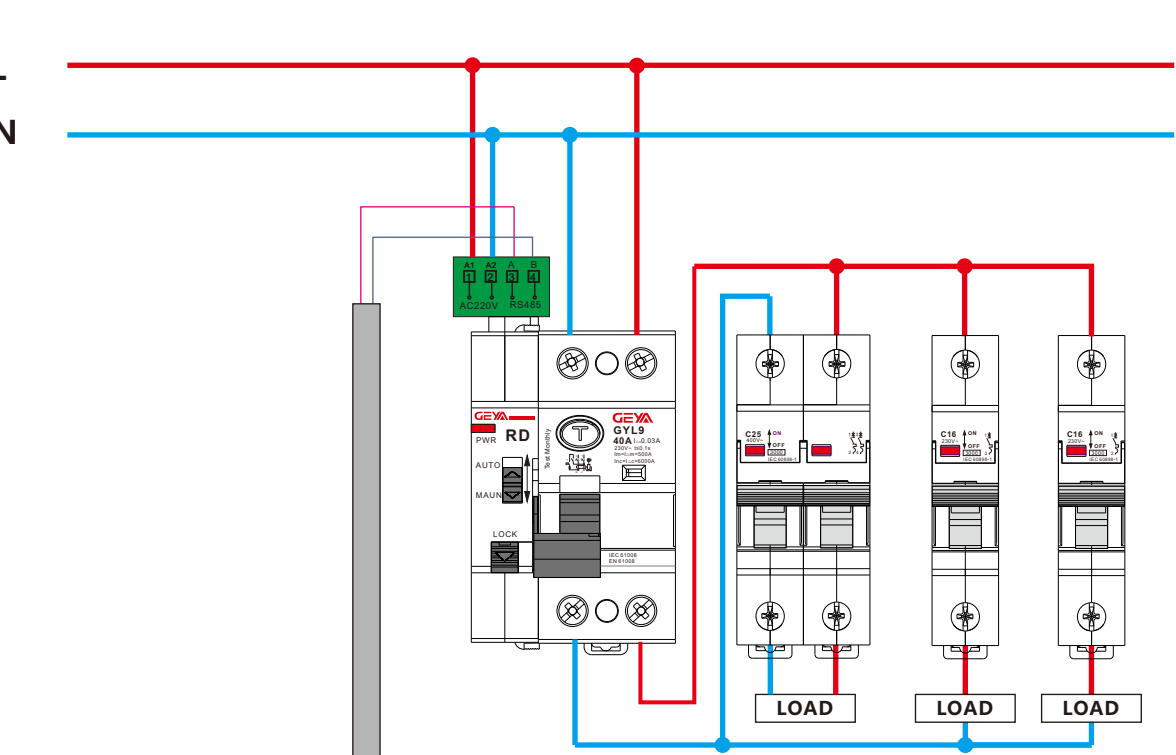

Programmable Logic Controller



PC

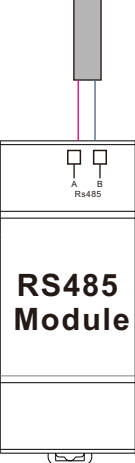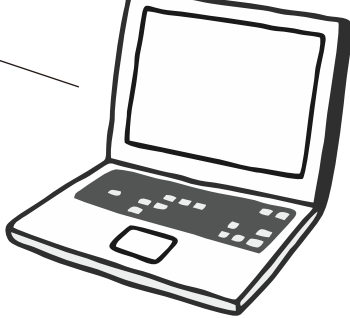

RS485 Module