

RFB-RA 系列

防水接线盒 | Waterproof Junction Box

壳体材料: ABS

孔塞材料: PVC

材料特性: 抗冲击性、耐热性、耐低温性、耐化学药品性及电气性能优良、表面光泽性好等特点。

认证: CE、ROHS

用途: 适用于室内、室外电气、通信、消防设备、钢铁冶炼、石油化工、电子、电力、铁路、建筑工地、采矿场、机场、宾馆、船舶、大型工厂、沿海工厂、卸货码头设备、污水处理设施、环境公害设施等。

安装方式: 1.内部安装: 盒子内部有供线路板或DIN轨道元件安装的凸台;
2.外部安装: 可通过盒体底部的安装孔直接固定于墙面(可通过盒子的四个角, 直接用螺丝或钉子固定在墙上或板子上。)

进出线孔: 防水盒可以根据电线大小在现有孔塞上选择使用, 或配套防水夹头, 达到防水最佳效果。

Body material: ABS

Stopper material: PVC


Material characteristics: Impact, heat, low temperature and chemical resistance, excellent electrical performance and surface gloss, etc.

Certificates: CE, ROHS

Application: Suitable for indoor and outdoor electric, communication, fire fighting apparatus, iron and steel smelting, petrochemical industry, electron, power system, railway, building, mine, air and sea port, hotel, ship, works, waste water treatment equipment, environmental equipment and so on.

Installation: 1, Inside: There are the installation holes in the base for circuit board or din rail.
2, Outside: The products can be directly fixed on the wall or other flat boards with screws or nails via the screw holes in the base.

Outlet hole: Cutting a hole in the PVC stopper as related cable size or installing cable gland to get better waterproof performance.

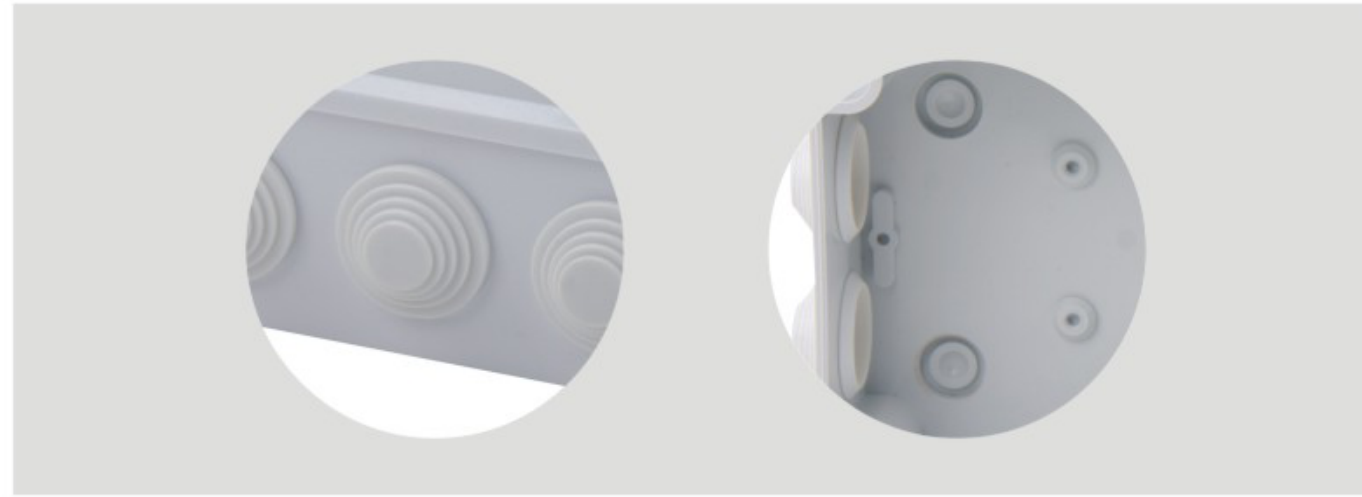

型号 Model Code	孔数 Hole Qty.	孔径(mm) Hole Size	IP	毛重(KG) G. Weight	净重(KG) N. Weight	装箱数(只) Qty/Carton	外箱尺寸(cm) Carton Dimension
RFB-RA 50 × 50	4	25	55	13.5	12.3	300	46 × 38 × 51
RFB-RA 80 × 50	4	25	55	14.7	13.4	240	53 × 35 × 62
RFB-RA 85 × 85 × 50	7	25	55	17.2	16.0	200	53 × 41 × 53
RFB-RA 100 × 100 × 70	7	25	65	14.9	13.5	100	62 × 49 × 35
RFB-RA 150 × 110 × 70	10	25	65	15.1	13.8	60	67 × 33 × 46.5
RFB-RA 150 × 150 × 70	8	25	65	16.3	15.0	60	84.5 × 34 × 45
RFB-RA 200 × 100 × 70	8	25	65	16.6	15.3	60	61 × 46 × 42
RFB-RA 200 × 155 × 80	10	36	65	14.5	13.2	40	69.5 × 43.5 × 42
RFB-RA 200 × 200 × 80	12	36	65	18.0	16.6	40	90 × 46 × 40.5
RFB-RA 255 × 200 × 80	12	36	65	21.9	20.1	40	55 × 45 × 78.5
RFB-RA 255 × 200 × 120	12	36	65	21.9	20.1	30	64 × 55 × 62
RFB-RA 300 × 250 × 120	12	36	65	20.3	18.4	20	61.5 × 55.5 × 63
RFB-RA 400 × 350 × 120	16	36	65	15.0	13.3	10	74.5 × 42.5 × 61.5

RFB-RA 系列

防水接线盒 | Waterproof Junction Box

RFB-RA 50 × 50



RFB-RA 80 × 50



RFB-RA 85 × 85 × 50



RFB-RA 100 × 100 × 70



RFB-RA 150 × 110 × 70



RFB-RA 系列

防水接线盒 | Waterproof Junction Box

RFB-RA 150×150×70



RFB-RA 200×100×70



RFB-RA 200×155×80



RFB-RA 200×200×80



RFB-RA 系列

防水接线盒 | Waterproof Junction Box

RFB-RA 255×200×80



RFB-RA 255×200×120



RFB-RA 300×250×120



RFB-RA 400×350×120



RFB-RT 系列

防水接线盒 | Waterproof Junction Box

壳体材料: ABS

材料特性: 抗冲击性、耐热性、耐低温性、耐化学药品性及电气性能优良、表面光泽性好等特点。

认证: CE、ROHS

用途: 适用于室内、室外电气、通信、消防设备、钢铁冶炼, 石油化工, 电子、电力, 铁路, 建筑工地, 采矿场, 机场, 宾馆, 船舶、大型工厂、沿海工厂、卸货码头设备、污水处理设施、环境公害设施等。

安装方式: 1.内部安装: 盒子内部有供线路板或DIN轨道元件安装的凸台;
2.外部安装: 可通过盒体底部的安装孔直接固定于墙面 (可通过盒子的四个角, 直接用螺丝或钉子固定在墙上或板子上。)

进出线孔: 防水盒上已经有孔印, 客户可以按自己要求敲落随意一个孔及全部, 配套防水夹紧接头, 达到防水最佳效果。

Body material: ABS

Material characteristics: Impact, heat, low temperature and chemical resistance, excellent electrical performance and surface gloss, etc.

Certificates: CE, ROHS

Application: Suitable for indoor and outdoor electric, communication, fire fighting apparatus, iron and steel smelting, petrochemical industry, electron, power system, railway, building, mine, air and sea port, hotel, ship, works, waste water treatment equipment, environmental equipment and so on.

Installation: 1, Inside: There are the installation holes in the base for circuit board or din rail.
2, Outside: The products can be directly fixed on the wall or other flat boards with screws or nails via the screw holes in the base.

Outlet hole: The plastic plate in the hole can be knocked off and installing cable gland to get better waterproof performance.



型号 Model Code	孔数 Hole Qty.	孔径(mm) Hole Size	IP	毛重(KG) G. Weight	净重(KG) N. Weight	装箱数(只) Qty/Carton	外箱尺寸(cm) Carton Dimension
RFB-RT 50 × 50	4	25	55	12.9	11.7	300	45.5 × 37.5 × 51
RFB-RT 80 × 50	4	25	55	13.1	11.8	240	53 × 35 × 62
RFB-RT 85 × 85 × 50	7	25	55	15.6	14.4	200	45 × 37 × 53
RFB-RT 100 × 100 × 70	7	25	65	13.9	12.5	100	57 × 46 × 35
RFB-RT 150 × 110 × 70	10	25	65	13.6	12.3	60	62 × 31.5 × 46.5
RFB-RT 150 × 150 × 70	8	25	65	15.6	14.3	60	79 × 31 × 46
RFB-RT 200 × 100 × 70	8	25	65	15.6	14.3	60	57 × 43 × 42
RFB-RT 200 × 155 × 80	10	36	65	13.3	12.0	40	64.5 × 40.5 × 41
RFB-RT 200 × 200 × 80	12	36	65	16.0	14.4	40	85 × 43 × 40.5
RFB-RT 255 × 200 × 80	12	36	65	19.8	18.0	40	81 × 51.5 × 41
RFB-RT 255 × 200 × 120	12	36	65	19.8	18.0	30	62 × 53 × 62
RFB-RT 300 × 250 × 120	12	36	65	19.7	17.8	20	61 × 52 × 61.5
RFB-RT 400 × 350 × 120	16	36	65	14.8	13.1	10	72 × 41 × 61.5

RFB-RT 系列

防水接线盒 | Waterproof Junction Box

RFB-RT 50 × 50



RFB-RT 80 × 50



RFB-RT 85 × 85 × 50



RFB-RT 100 × 100 × 70



RFB-RT 150 × 110 × 70



RFB-RT 系列

防水接线盒 | Waterproof Junction Box

RFB-RT 150 × 150 × 70



RFB-RT 200 × 100 × 70



RFB-RT 200 × 155 × 80



RFB-RT 200 × 200 × 80



RFB-RT 系列

防水接线盒 | Waterproof Junction Box

RFB-RT 255 × 200 × 80



RFB-RT 255 × 200 × 120



RFB-RT 300 × 250 × 120



RFB-RT 400 × 350 × 120



RFB-KT 系列

防水接线盒 | Waterproof Junction Box

壳体材料: ABS或PC

材料特性: 抗冲击性、耐热性、耐低温性、耐化学药品性及电气性能优良、表面光泽性好等特点

认证: CE、ROHS

防护等级: IP65

用途: 适用于室内、室外电气、通信、消防设备、钢铁冶炼、石油化工、电子、电力、铁路、建筑工地、采矿场、机场、宾馆、船舶、大型工厂、沿海工厂、卸货码头设备、污水处理设施、环境公害设施等。

安装方式: 1. 内部安装: 盒子内部有供线路板或DIN轨道元件安装的凸台, 及自带的铜接线螺母 (每只防水盒内部都配有最少二个以上的很常规的M4的铜螺母)
2. 外部安装: 可通过盒体底部的安装孔直接固定于墙面 (可通过盒子的四个角, 直接用螺丝或钉子固定在墙上或板子上。)

进出线孔: 防水盒可以随意根据客户的使用要求在上面开孔, (开孔位置及开孔大小都可以按照客户指定要求加工。) 开孔后可以装有配套的防水夹头, 达到防水最佳效果。

Body material: ABS or PC

Material characteristics: Impact, heat, low temperature and chemical resistance, excellent electrical performance and surface gloss, etc.

Certificates: CE, ROHS

Protection grade: IP65

Application: Suitable for indoor and outdoor electric, communication, fire fighting apparatus, iron and steel smelting, petrochemical industry, electron, power system, railway, building, mine, air and sea port, hotel, ship, works, waste water treatment equipment, environmental equipment and so on.

Installation: 1, Inside: There are the installation holes in the base for circuit board or din rail (More than 2 pcs of M4 brass nuts have been in each box).
2, Outside: The products can be directly fixed on the wall or other flat boards with screws or nails via the screw holes in the base.

Outlet hole: Holes can be opened on the box as customers' requirements, and installing cable gland can bring with better waterproof performance.




型号 Model Code	毛/净重(KG) G.W./N.W.	装箱数(只) Qty/Carton	外箱尺寸(cm) Carton Dimension	型号 Model Code	毛/净重(KG) G.W./N.W.	装箱数(只) Qty/Carton	外箱尺寸(cm) Carton Dimension
RFB-KT 65×50×55	21.5/20.0	300	52×41×29.5	RFB-KT 200×150×130	21.6/20.1	40	61.5×41×68.5
RFB-KT 95×65×55	25.1/23.6	240	49.5×40.5×46.5	RFB-KT 200×200×95	18.5/17.0	30	62×42×49.5
RFB-KT 100×100×75	20.4/18.9	100	52×42×39.5	RFB-KT 200×200×130	14.6/13.1	20	42×42×67
RFB-KT 110×80×45	24.3/22.8	200	46×42×47	RFB-KT 250×80×70	15.7/14.2	50	52×41×36
RFB-KT 110×80×70	20.0/18.5	120	57×33.5×45	RFB-KT 250×80×85	18.8/17.3	50	52×42×44.5
RFB-KT 110×80×85	19.7/18.2	100	57×33.5×45	RFB-KT 250×150×100	11.5/10.0	20	52×32×52
RFB-KT 125×125×75	16.6/15.1	60	52×39.5×39.5	RFB-KT 250×150×130	17.1/15.6	30	52×47×67
RFB-KT 125×125×100	19.4/17.9	60	52×39.5×52	RFB-KT 280×190×130	10.6/9.1	10	40×30×67
RFB-KT 130×80×70	21.4/19.9	120	54×41.5×45	RFB-KT 280×190×180	14.5/13.0	12	58×40×56
RFB-KT 130×80×85	25.4/23.9	120	54×50×44.5	RFB-KT 280×280×130	8.6/7.1	6	58×58×41
RFB-KT 160×80×55		100	42×34×57	RFB-KT 280×280×180	9.6/8.1	6	58×58×56
RFB-KT 160×80×95		50	42×34×49.5	RFB-KT 340×280×130	9.5/8	6	57.5×35×41
RFB-KT 170×140×95	17.8/16.3	50	57.5×52×49.5	RFB-KT 340×280×180	7.9/6.4	4	57.5×35×37.5
RFB-KT 175×125×75	17.0/15.5	50	54×52.5×32	RFB-KT 380×190×130	10.9/9.4	8	40×40×54
RFB-KT 175×125×100	11.9/10.4	30	39.5×37×52	RFB-KT 380×190×180	12.5/11	6	40×59×38
RFB-KT 175×175×100	14.4/12.9	30	54.5×37×53.5	RFB-KT 380×280×130	9.8/8.3	6	57.5×39×41
RFB-KT 180×80×70	20.4/18.9	90	56×41×46	RFB-KT 380×280×180	8.0/6.5	4	57.5×39×37.5
RFB-KT 200×150×100	28.5/27	30	47×42×67				


RFB-KT 系列

防水接线盒 | Waterproof Junction Box


RFB-KT 65×50×55




RFB-KT 95×65×55




RFB-KT 100×100×75



RFB-KT 110×80×45



RFB-KT 110×80×70



RFB-KT 系列

防水接线盒 | Waterproof Junction Box

RFB-KT 110×80×85



RFB-KT 125×125×75



RFB-KT 125×125×100



RFB-KT 130×80×70



RFB-KT 130×80×85



RFB-KT 系列

防水接线盒 | Waterproof Junction Box

RFB-KT 170×140×95



RFB-KT 175×125×75



RFB-KT 175×125×100



RFB-KT 175×175×100



RFB-KT 180×80×70



RFB-KT 系列

防水接线盒 | Waterproof Junction Box

RFB-KT 200 × 150 × 100



RFB-KT 200 × 150 × 130



RFB-KT 200 × 200 × 95



RFB-KT 200 × 200 × 130



RFB-KT 250 × 80 × 70



RFB-KT 系列

防水接线盒 | Waterproof Junction Box

RFB-KT 250 × 80 × 85



RFB-KT 250 × 150 × 100



RFB-KT 250 × 150 × 130



RFB-KT 280 × 190 × 130



RFB-KT 280 × 190 × 180



RFB-KT 系列

防水接线盒 | Waterproof Junction Box

RFB-KT 280 × 280 × 130



RFB-KT 280 × 280 × 180



RFB-KT 340 × 280 × 130



RFB-KT 340 × 280 × 180



RFB-KT 系列

防水接线盒 | Waterproof Junction Box

RFB-KT 380 × 190 × 130



RFB-KT 380 × 190 × 180



RFB-KT 380 × 280 × 130



RFB-KT 380 × 280 × 180



RFB-GT 系列

防水接线盒 | Waterproof Junction Box

壳体材料: ABS或PC

材料特性: 抗冲击性、耐热性、耐低温性、耐化学药品性及电气性能优良、表面光泽性好等特点

认证: CE、ROHS

防护等级: IP65

用途: 适用于室内、室外电气、通信、消防设备、钢铁冶炼、石油化工、电子、电力、铁路、建筑工地、采矿场、机场、宾馆、船舶、大型工厂、沿海工厂、卸货码头设备、污水处理设施、环境公害设施等。

安装方式: 1. 内部安装: 盒子内部有供线路板或DIN轨道元件安装的凸台, 及自带的铜接线螺母 (每只防水盒内部都配有最少二个以上的很常规的M4的铜螺母)
2. 外部安装: 可通过盒体底部的安装孔直接固定于墙面 (可通过盒子的四个角, 直接用螺丝或钉子固定在墙上或板子上。)

进出线孔: 防水盒可以随意根据客户的使用要求在上面开孔, (开孔位置及开孔大小都可以按照客户指定要求加工。) 开孔后可以装有配套的防水夹紧接头, 达到防水最佳效果。

Body material: ABS or PC

Material characteristics: Impact, heat, low temperature and chemical resistance, excellent electrical performance and surface gloss, etc.

Certificates: CE, ROHS

Protection grade: IP65

Application: Suitable for indoor and outdoor electric, communication, fire fighting apparatus, iron and steel smelting, petrochemical industry, electron, power system, railway, building, mine, air and sea port, hotel, ship, works, waste water treatment equipment, environmental equipment and so on.

Installation: 1, Inside: There are the installation holes in the base for circuit board or din rail (More than 2 pcs of M4 brass nuts have been in each box).

2, Outside: The products can be directly fixed on the wall or other flat boards with screws or nails via the screw holes in the base.

Outlet hole: Holes can be opened on the box as customers' requirements, and installing cable gland can bring with better waterproof performance.




型号 Model Code	毛重(KG) G. Weight	净重(KG) N. Weight	装箱数(只) Qty/Cartron	外箱尺寸(cm) Carton Dimenstion
RFB-GT 300 × 200 × 160	12.9	11.4	8	60 × 46 × 32
RFB-GT 300 × 200 × 180	13.4	11.9	8	64.5 × 40.5 × 54
RFB-GT 300 × 300 × 180	13.8	12.3	6	61.5 × 34 × 56.5
RFB-GT 400 × 300 × 180	17.0	15.5	6	66 × 41 × 56.5
RFB-GT 500 × 400 × 200	13.5	12.0	3	51 × 44 × 63
RFB-GT 600 × 400 × 220	17.5	16.0	3	61.5 × 41 × 68.5


RFB-GT 系列

防水接线盒 | Waterproof Junction Box


RFB-GT 300 × 200 × 160




RFB-GT 300 × 200 × 180




RFB-GT 300 × 300 × 180




RFB-GT 400 × 300 × 180



RFB-GT 500 × 400 × 200



RFB-GT 600 × 400 × 220



RFB-NT 系列

防水接线盒 | Waterproof Junction Box

壳体材料: ABS或PC

材料特性: 抗冲击性、耐热性、耐低温性、耐化学药品性及电气性能优良、表面光泽性好等特点

认证: CE、ROHS

防护等级: IP65

用途: 适用于室内、室外电气、通信、消防设备、钢铁冶炼、石油化工、电子、电力、铁路、建筑工地、采矿场、机场、宾馆、船舶、大型工厂、沿海工厂、卸货码头设备、污水处理设施、环境公害设施等。

安装方式: 1. 内部安装: 盒子内部有供线路板或DIN轨道元件安装的凸台, 及自带的铜接线螺母 (每只防水盒内部都配有最少二个以上的很常规的M4的铜螺母)
2. 外部安装: 可通过盒体底部的安装孔直接固定于墙面 (可通过盒子的四个角, 直接用螺丝或钉子固定在墙上或板子上。)

进出线孔: 防水盒可以随意根据客户的使用要求在上面开孔, (开孔位置及开孔大小都可以按照客户指定要求加工。) 开孔后可以装有配套的防水夹紧接头, 达到防水最佳效果。

Body material: ABS or PC

Material characteristics: Impact, heat, low temperature and chemical resistance, excellent electrical performance and surface gloss, etc.

Certificates: CE, ROHS

Protection grade: IP65

Application: Suitable for indoor and outdoor electric, communication, fire fighting apparatus, iron and steel smelting, petrochemical industry, electron, power system, railway, building, mine, air and sea port, hotel, ship, works, waste water treatment equipment, environmental equipment and so on.

Installation: 1, Inside: There are the installation holes in the base for circuit board or din rail (More than 2 pcs of M4 brass nuts have been in each box).

2, Outside: The products can be directly fixed on the wall or other flat boards with screws or nails via the screw holes in the base.

Outlet hole: Holes can be opened on the box as customers' requirements, and installing cable gland can bring with better waterproof performance.




型号 Model Code	毛重(KG) G. Weight	净重(KG) N. Weight	装箱数(只) Qty/Cartron	外箱尺寸(cm) Carton Dimenstion
RFB-NT 120 × 80 × 50	12.4	10.9	100	47 × 28 × 57
RFB-NT 150 × 110 × 70	13.0	11.5	60	61 × 34 × 44
RFB-NT 190 × 140 × 70	19.7	18.2	60	74.5 × 41 × 44
RFB-NT 240 × 190 × 90	13.5	12	20	53 × 42 × 49.5
RFB-NT 300 × 220 × 120	19.9	18.4	20	65 × 48 × 65.5
RFB-NT 380 × 300 × 120	18.3	16.8	10	65 × 41.5 × 65


RFB-NT 系列

防水接线盒 | Waterproof Junction Box


RFB-NT 120 × 80 × 50




RFB-NT 150 × 110 × 70




RFB-NT 190 × 140 × 70




RFB-NT 240 × 190 × 90



RFB-NT 300 × 220 × 120



RFB-NT 380 × 300 × 120



RFB-AT 系列

防水接线盒 | Waterproof Junction Box

壳体材料: ABS或PC

材料特性: 抗冲击性、耐热性、耐低温性、耐化学药品性及电气性能优良、表面光泽性好等特点

认证: CE、ROHS

防护等级: IP65

用途: 适用于室内、室外电气、通信、消防设备、钢铁冶炼、石油化工、电子、电力、铁路、建筑工地、采矿场、机场、宾馆、船舶、大型工厂、沿海工厂、卸货码头设备、污水处理设施、环境公害设施等。

安装方式: 1. 内部安装: 盒子内部有供线路板或DIN轨道元件安装的凸台, 及自带的铜接线螺母 (每只防水盒内部都配有最少二个以上的很常规的M4的铜螺母)
2. 外部安装: 可通过盒体底部的安装孔直接固定于墙面 (可通过盒子的四个角, 直接用螺丝或钉子固定在墙上或板子上。)

进出线孔: 防水盒可以随意根据客户的使用要求在上面开孔, (开孔位置及开孔大小都可以按照客户指定要求加工。) 开孔后可以装有配套的防水夹紧接头, 达到防水最佳效果。

Body material: ABS or PC

Material characteristics: Impact, heat, low temperature and chemical resistance, excellent electrical performance and surface gloss, etc.

Certificates: CE, ROHS

Protection grade: IP65

Application: Suitable for indoor and outdoor electric, communication, fire fighting apparatus, iron and steel smelting, petrochemical industry, electron, power system, railway, building, mine, air and sea port, hotel, ship, works, waste water treatment equipment, environmental equipment and so on.

Installation: 1, Inside: There are the installation holes in the base for circuit board or din rail (More than 2 pcs of M4 brass nuts have been in each box).

2, Outside: The products can be directly fixed on the wall or other flat boards with screws or nails via the screw holes in the base.

Outlet hole: Holes can be opened on the box as customers' requirements, and installing cable gland can bring with better waterproof performance.




型号 Model Code	毛重(KG) G. Weight	净重(KG) N. Weight	装箱数(只) Qty/Carton	外箱尺寸(cm) Carton Dimension
RFB-AT 150 × 100 × 70	12.1	11.1	60	61.5 × 33.5 × 37
RFB-AT 150 × 150 × 90	9.3	8.3	30	46.5 × 33 × 47.5
RFB-AT 200 × 100 × 70	12.8	11.8	50	55 × 41 × 38
RFB-AT 220 × 170 × 110	16.8	15.8	30	58.5 × 46 × 58
RFB-AT 290 × 190 × 140	16.5	15.5	20	59.5 × 43.5 × 73
RFB-AT 330 × 330 × 130			10	67.5 × 35.5 × 68.5
RFB-AT 390 × 290 × 160	9.7	8.7	6	58.5 × 39.5 × 32.5


RFB-AT 系列

防水接线盒 | Waterproof Junction Box


RFB-AT 150 × 100 × 70




RFB-AT 150 × 150 × 90




RFB-AT 200 × 100 × 70




RFB-AT 220 × 170 × 110



RFB-AT 290 × 190 × 140



RFB-AT 390 × 290 × 160



RFB-MS 系列


明装配电箱 | Surface distribution box

壳体材料: ABS
透明门板: PC
接线端子: 铜
材料特性: 抗冲击性、耐热性、耐低温性、耐化学药品性及电气性能优良、表面光泽性好等特点
认证: CE、ROHS
防护等级: IP50
用途: 适用于室内、室外电气、通信、消防设备、钢铁冶炼、石油化工、电子、电力、铁路、建筑工地、采矿场、机场、宾馆、船舶、大型工厂、沿海工厂、卸货码头设备、污水处理设施、环境公害设施等。
安装方式: 1. 内部安装: 盒子内部有供导轨式断路器安装的导轨, 及用于接线的零线排和地线排。
2. 外部安装: 可通过盒体底部的安装孔直接固定于墙面 (可通过盒子的四个角, 直接用螺丝或钉子固定在墙上或板子上。)
进出线孔: 箱体设有可供穿线的预留孔。

Body material: ABS
Transparent door: PC
Earth/Natural bars: Brass
Material characteristics: Impact, heat, low temperature and chemical resistance, excellent electrical performance and surface gloss, etc.
Certificates: CE, ROHS
Protection grade: IP50
Application: Suitable for indoor and outdoor electric, communication, fire fighting apparatus, iron and steel smelting, petrochemical industry, electron, power system, railway, building, mine, air and sea port, hotel, ship, works, waste water treatment equipment, environmental equipment and so on.
Installation: 1, Inside: There are din rail inside for din-rail type circuit breakers, earth bar and natural bar for cable connection.
2, Outside: The products can be directly fixed on the wall or other flat boards with screws or nails via the screw holes in the base.
Outlet hole: The plastic plate in the hole can be knocked off for cables.



型号 Model Code	外形尺寸 Outside Dimension (mm)			毛重(KG) G. Weight	净重(KG) N. Weight	装箱数(只) Qty/Carton	外箱尺寸(cm) Carton Dimension
	L	W	H				
RFB-MS 4WAY	112	200	95	11.5	8.7	30	51 × 36 × 45.5
RFB-MS 6WAY	148	200	95	14.9	11.5	30	51 × 42.5 × 50
RFB-MS 8WAY	184	200	95	16.7	12.8	30	52 × 43.5 × 59.5
RFB-MS 10WAY	222	200	95	13	9.8	20	51 × 43 × 48.5
RFB-MS 12WAY	256	200	95	14.8	11.5	20	52 × 43 × 55
RFB-MS 15WAY	310	200	95	12.8	9.9	15	50.5 × 33.5 × 64
RFB-MS 18WAY	365	222	95	15.2	12.8	15	52 × 38 × 71
RFB-MS 24WAY	271	325	97	13.2	10.3	10	55 × 35 × 57.5
RFB-MS 36WAY	271	462	100	18.5	14.8	5	54.5 × 28.5 × 48

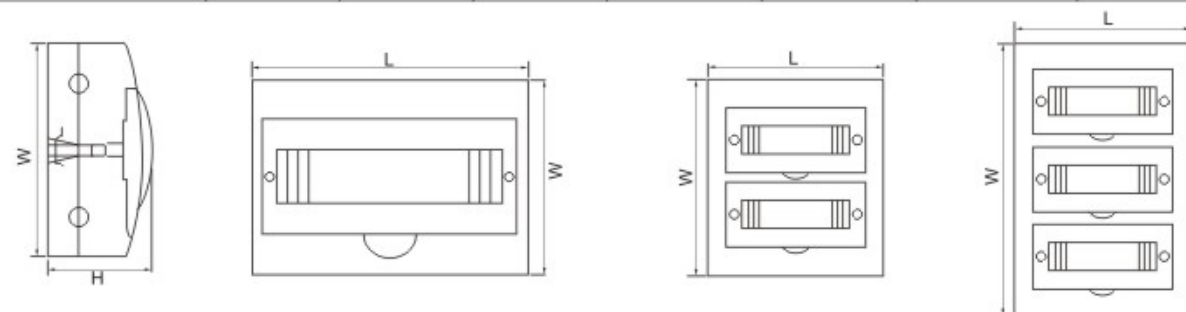

RFB-MS 系列

明装配电箱 | Surface distribution box

RFB-MS 4WAYS



RFB-MS 6WAYS



RFB-MS 8WAYS



RFB-MS 10WAYS



RFB-MS 12WAYS



RFB-MS 15WAYS



RFB-MS 18WAYS



RFB-MS 24WAYS




RFB-MF 系列


暗装配电箱 | Flush distribution box

壳体材料: ABS
透明门板: PC
接线端子: 铜
材料特性: 抗冲击性、耐热性、耐低温性、耐化学药品性及电气性能优良、表面光泽性好等特点
认 证: CE、ROHS
防护等级: IP50
用 途: 适用于室内、室外电气、通信、消防设备、钢铁冶炼、石油化工、电子、电力、铁路、建筑工地、采矿场、机场、宾馆、船舶、大型工厂、沿海工厂、卸货码头设备、污水处理设施、环境公害设施等。
安装方式: 1. 内部安装: 盒子内部有供导轨式断路器安装的导轨, 及用于接线的零线排和地线排。
2. 外部安装: 可通过盒体底部的安装孔直接嵌入于墙内。
进出线孔: 箱体设有可供穿线的预留孔。

Body material: ABS
Transparent door: PC
Earth/Natural bars: Brass
Material characteristics: Impact, heat, low temperature and chemical resistance, excellent electrical performance and surface gloss, etc.
Certificates: CE, ROHS
Protection grade: IP50
Application: Suitable for indoor and outdoor electric, communication, fire fighting apparatus, iron and steel smelting, petrochemical industry, electron, power system, railway, building, mine, air and sea port, hotel, ship, works, waste water treatment equipment, environmental equipment and so on.
Installation: 1, Inside: There are din rail inside for din-rail type circuit breakers, earth bar and natural bar for cable connection.
2, Outside: The products can be directly fixed in the wall with screws or nails via the screw holes in the base.
Outlet hole: The plastic plate in the hole can be knocked off for cables.

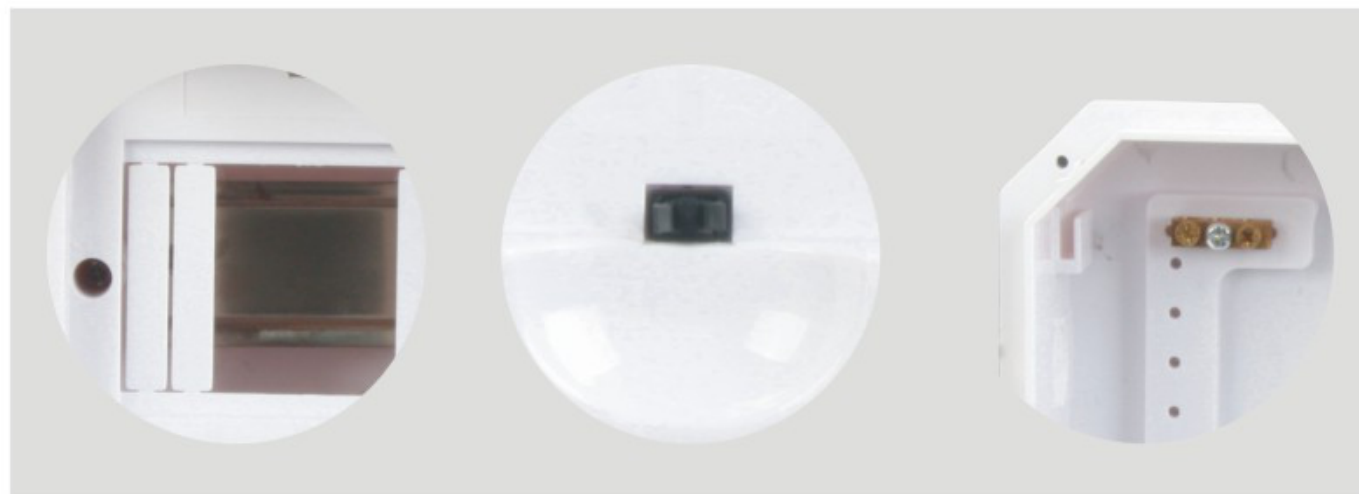

型号 Model Code	外形尺寸 Outside Dimension (mm)						毛重(KG) G. Weight	净重(KG) N. Weight	装箱数(只) Qty/Carton	外箱尺寸(cm) Carton Dimension
	L1	W1	H1	L	W	H				
RFB-MF 4WAY	115	197	60	136	222	27	12.4	8.7	30	47 × 44 × 47.3
RFB-MF 6WAY	148	197	60	170	222	27	14.9	11.1	30	54.3 × 46.8 × 47
RFB-MF 8WAY	184	197	60	207	222	27	17.7	13.2	30	69.5 × 48 × 44.2
RFB-MF 10WAY	222	197	60	243	222	27	13.2	9.8	20	51 × 47.5 × 48.5
RFB-MF 12WAY	258	197	60	279	222	27	14.7	11	20	47 × 46 × 60.5
RFB-MF 15WAY	310	197	60	334	222	27	12.3	9.3	15	48 × 36 × 72
RFB-MF 18WAY	365	219	67	398	251	27	16.6	12.9	15	57 × 42 × 78
RFB-MF 24WAY	258	310	66	300	345	27	13	10	10	51.5 × 37 × 63.5
RFB-MF 36WAY	258	449	66	300	484	27	18.1	14.2	5	54 × 31.5 × 50.2

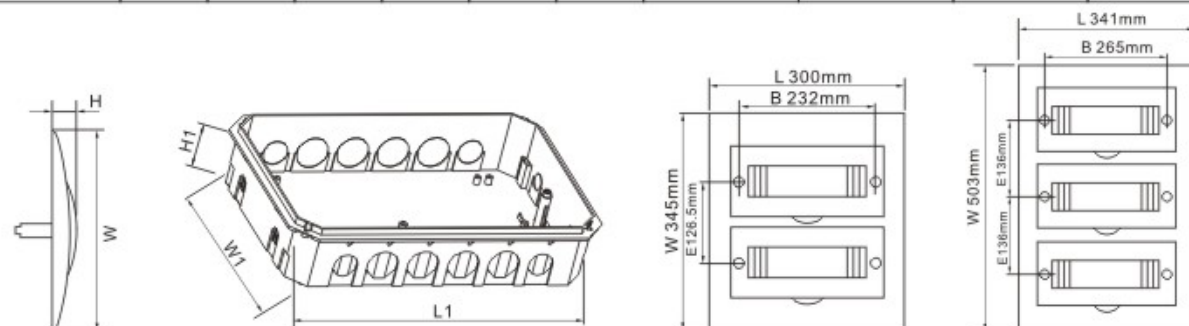

RFB-MF 系列

暗装配电箱 | Flush distribution box


RFB-MF 4WAYS




RFB-MF 6WAYS



RFB-MF 8WAYS

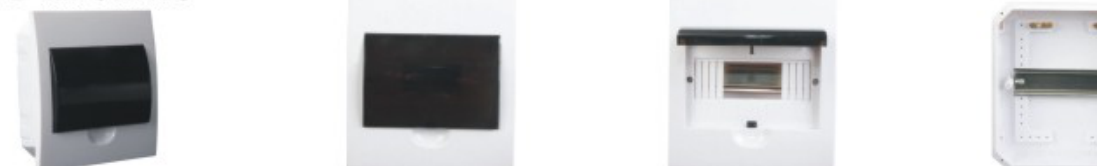

RFB-MF 10WAYS

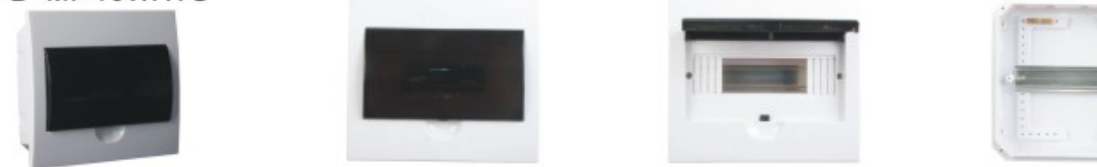

RFB-MF 12WAYS



RFB-MF 15WAYS



RFB-MF 18WAYS



RFB-MF 24WAYS




RFB-HT 系列


明装配电箱 | Surface distribution box

壳体材料: ABS
透明门板: PC
材料特性: 抗冲击性、耐热性、耐低温性、耐化学药品性及电气性能优良、表面光泽性好等特点
认证: CE、ROHS
防护等级: IP65
用途: 适用于室内、室外电气、通信、消防设备、钢铁冶炼、石油化工、电子、电力、铁路、建筑工地、采矿场、机场、宾馆、船舶、大型工厂、沿海工厂、卸货码头设备、污水处理设施、环境公害设施等。
安装方式: 1. 内部安装: 盒子内部有供导轨式断路器安装的导轨, 及用于接线的零线排和地线排。
2. 外部安装: 可通过箱体底部的安装孔直接固定于墙面 (可通过盒子的四个角, 直接用螺丝或钉子固定在墙上或板子上。)
进出线孔: 箱体设有可供穿线的预留孔。

Body material: ABS
Transparent door: PC
Material characteristics: Impact, heat, low temperature and chemical resistance, excellent electrical performance and surface gloss, etc.
Certificates: CE, ROHS
Protection grade: IP65
Application: Suitable for indoor and outdoor electric, communication, fire fighting apparatus, iron and steel smelting, petrochemical industry, electron, power system, railway, building, mine, air and sea port, hotel, ship, works, waste water treatment equipment, environmental equipment and so on.
Installation: 1, Inside: There are din rail inside for din-rail type circuit breakers, earth bar and natural bar for cable connection.
2, Outside: The products can be directly fixed on the wall or other flat boards with screws or nails via the screw holes in the base.
Outlet hole: The plastic plate in the hole can be knocked off for cables.

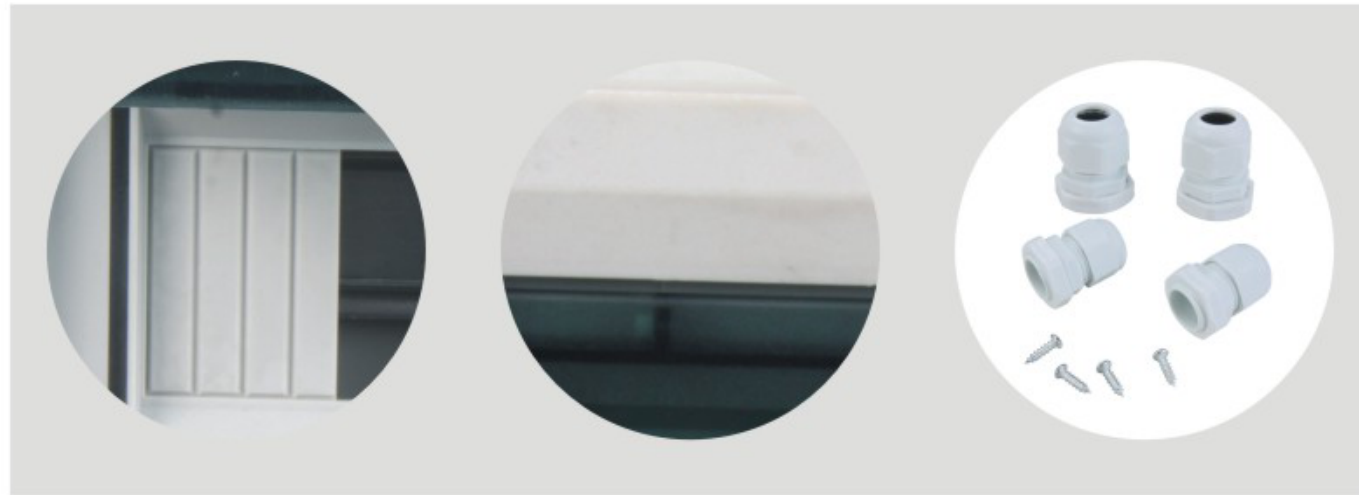

型号 Model Code	外形尺寸 Outside Dimension (mm)			毛重(KG) G. Weight	净重(KG) N. Weight	装箱数(只) Qty/ Carton	外箱尺寸(cm) Carton Dimension
	L	W	H				
RFB-HT 5WAYS	115	150	90	13	11.9	40	49 × 33 × 48
RFB-HT 8WAYS	197	150	90	14.2	13.2	30	48 × 41.5 × 48.5
RFB-HT 12WAYS	250	193	105	16.3	15.3	20	52.5 × 40.5 × 57
RFB-HT 15WAYS	305	195	105	18.5	17.5	20	63 × 40.5 × 57
RFB-HT 18WAYS	360	198	105	20.4	19.4	20	74 × 40.5 × 57
RFB-HT 24WAYS	270	350	105	14.6	13.6	10	56.5 × 36.5 × 56.5

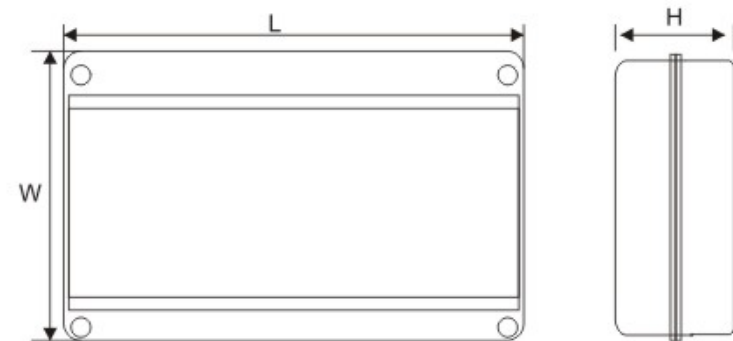

RFB-HT 系列

明装配电箱 | Surface distribution box

RFB-HT 5WAYS



RFB-HT 8WAYS




RFB-HT 12WAYS



RFB-HT 15WAYS



RFB-HT 18WAYS

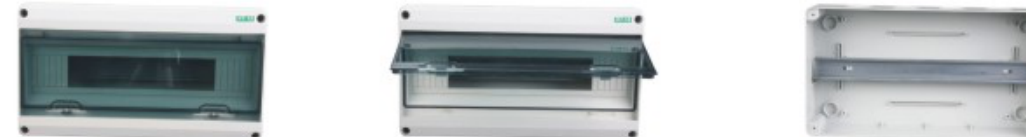

RFB-HT 24WAYS



RFB-S 系列


明装配电箱 | Surface distribution box

壳体材料: ABS
 材料特性: 抗冲击性、耐热性、耐低温性、耐化学药品性及电气性能优良、表面光泽性好等特点
 认证: CE、ROHS
 防护等级: IP30
 用途: 适用于室内、室外电气、通信、消防设备、钢铁冶炼、石油化工、电子、电力、铁路、建筑工地、采矿场、机场、宾馆、船舶、大型工厂、沿海工厂、卸货码头设备、污水处理设施、环境公害设施等。
 安装方式: 1. 内部安装: 盒子内部有导轨式断路器安装的导轨。
 2. 外部安装: 可通过箱体底部的安装孔直接固定于墙面(可通过盒子的四个角, 直接用螺丝或钉子固定在墙上或板子上。)
 进出线孔: 箱体设有可供穿线的预留孔。

Body material: ABS
 Material characteristics: Impact, heat, low temperature and chemical resistance, excellent electrical performance and surface gloss, etc.
 Certificates: CE, ROHS
 Protection grade: IP30
 Application: Suitable for indoor and outdoor electric, communication, fire fighting apparatus, iron and steel smelting, petrochemical industry, electron, power system, railway, building, mine, air and sea port, hotel, ship, works, waste water treatment equipment, environmental equipment and so on.
 Installation: 1. Inside: There are din rail inside for din-rail type circuit breakers .
 2. Outside: The products can be directly fixed on the wall or other flat boards with screws or nails via the screw holes in the base.
 Outlet hole: The plastic plate in the hole can be knocked off for cables.



型号 Model Code	外形尺寸 Outside Dimension (mm)			毛重(KG) G. Weight	净重(KG) N. Weight	装箱数(只) Qty/Carton	外箱尺寸(cm) Carton Dimension
	L	W	H				
RFB-S 1WAY	34	130	60	18	16.5	300	41 × 34.5 × 64
RFB-S 2WAY	52	130	60	17.3	15.8	240	54.5 × 32 × 66
RFB-S 4WAY	87	130	60	10.9	9.4	100	55 × 32 × 47

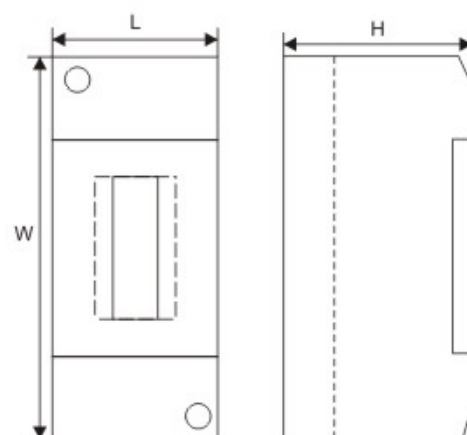

RFB-S 系列

明装配电箱 | Surface distribution box

RFB-S 1WAY



RFB-S 2WAY



RFB-S 4WAY

