

PHOTO-ELECTRIC LIGHT CONTROL 光敏感應器



Photo-Electric Light Control TPS(AS)



欢迎使用TPS-AS光控传感器!

本产品可以自动根据环境光打开或关闭灯光。环境温度和湿度不能影响它。它不仅方便而且实用,它可以控制负载只在夜间工作。用于公路灯、花园灯等。



Welcome to use TPS-AS06 light-control sensor !

The product can turn on or turn off light automatically according to ambient-light. Ambient temperature and humidity can't affect it. It is not only convenient but also practical; it can control the load working only at night. It is used for road light, garden light etc.

Incorrect
不正确的



Correct
正确的

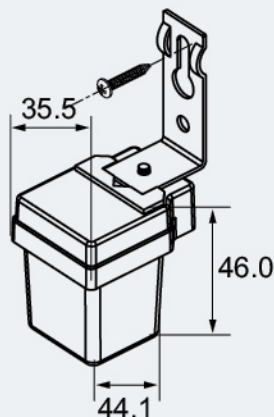

ItemNo	TPS(AS)
Available Operating Voltages	110V, 220V, AC 50/60Hz
Load Rating	3A, 6A, 10A Tungsten
Life Rated Load	5000Operations Minimum
Turn ON/TURN OFF	< 1/5
Time Delay	30 to 120 Seconds (Instant Available)
Temperature Range	-10℃ to + 50℃
Power Consumption	< 1W
Dimension	102 × 65 × 38mm
QTY	200
G.W	13.5
N.W	11
MEAS	415 × 345 × 225
Photocell	Cds or Siticon Phototransistor
Ambient Light	< 5-30LUX (adjustable)

ORDER CODENO	RATING
AS2203	AC 220V 3A
AS-2206	AC 220V 6A
AS-22010	AC 220V 10A
AS-11003	AC 110C 3A
AS-11006	AC 110V 6A
AS-11010	AC 110V 10A

1.Must be installed the place which avoid the direct electric light.

2.Don't install in dark place a day time.

3.First connect the load wire.

4.Load Wire :Red

5.Common Wire :White

6.Line Wire :Black




PHOTO-ELECTRIC LIGHT CONTROL 光敏感應器



Photo-Electric Light Control TPS-C(ASO)




欢迎使用TPC(ASO)光控传感器!

本产品可以自动根据环境光打开或关闭灯光。环境温度和湿度不能影响它。它不仅方便而且实用,它可以控制负载只在夜间工作。用于公路灯、花园灯等。




Welcome to use TPC(ASO) light-control sensor!

The product can turn on or turn off light automatically according to ambient-light. Ambient temperature and humidity can't affect it. It is not only convenient but also practical; it can control the load working only at night. It is used for road light, garden light etc.

Incorrect
不正确的



Correct
正确的

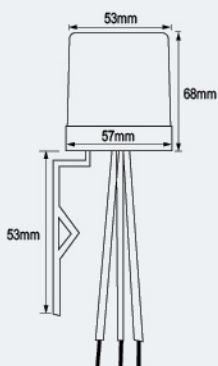

ItemNo	TPS-C(ASO)
Available Operating Voltages	110V, 220V, AC 50/60Hz
Load Rating	3A, 6A, 10A, 16A, 20A, 25A, 30A
Life Rated Load	5000Operations Minimum
Turn ON/TURN OFF	< 1/5
Time Delay	30 to 120 Seconds (Instant Available)
Temperature Range	-10℃ to +50℃
Power Consumption	< 1W
Dimension	57 × 121 × 53mm
QTY	100
G.W	12.5
N.W	11
MEAS	415 × 345 × 290
Photocell	Cds or Sition Phototransistor
Ambient Light	< 5-30LUX (adjustable)

ORDER CODE NO	RATING
ASO-2203	AC 220V 3A
ASO-2206	AC 220V 6A
ASO-22010	AC 220V 10A
ASO-22020	AC 220V 20A
ASO-22025	AC 220V 25A
ASO-22030	AC 220V 30A
ASO-11003	AC 110V 3A
ASO-11006	AC 110V 6A
ASO-11010	AC 110V 10A
ASO-11020	AC 110V 20A
ASO-11025	AC 110V 25A
ASO-11030	AC 110V 30A


PHOTO-ELECTRIC
LIGHT CONTROL
光敏感應器



Photo-Electric
Light Control
THC-302 10A

欢迎使用THC-302光控传感器!
本产品可以自动根据环境光打开或关闭灯光。环境温度和湿度不能影响它。它不仅方便而且实用,它可以控制负载只在夜间工作。用于公路灯、花园灯等。

Welcome to use THC-302 light-control sensor!
The product can turn on or turn off light automatically according to ambient-light. Ambient temperature and humidity can't affect it. It is not only convenient but also practical; it can control the load working only at night. It is used for road light, garden light etc.

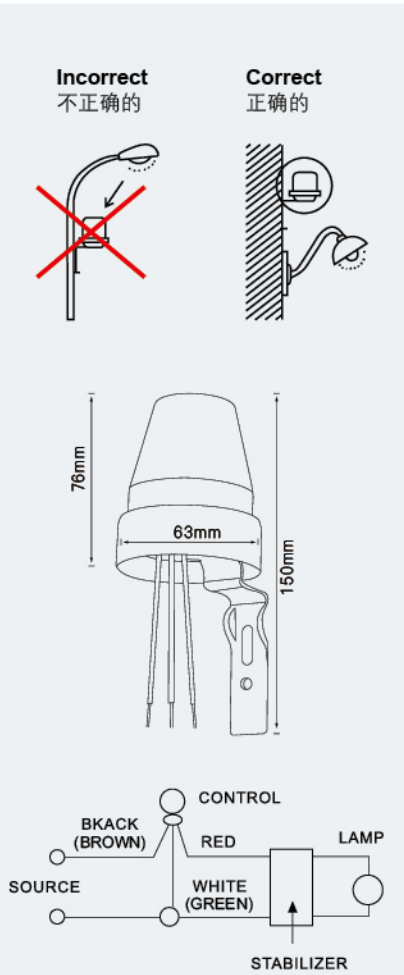

ItemNo	THC-302
Available Ooperating Voltages	110V, 220V, AC 50/60Hz
Load Rating	3A, 6A, 10A
Life Rated Load	5000Operations Minimum
Turn ON/TURN OFF	< 1/5
Time Delay	30 to 120 Seconds (Instant Availtable)
Temperature Range	-10℃ to +50℃
Power Consumption	< 1W
Dimension	57 × 121 × 53mm
QTY	100
G.W	14.6
N.W	10.6
MEAS	490 × 380 × 300
Photocell	Cds or Siticon Phototransistor
Ambient Light	5-100LUX (adjustable)

ORDER CODE NO	RATING
THC-302	AC 110V 3A
THC-302	AC 110V 6A
THC-302	AC 110V 10A
THC-302	AC 220V 3A
THC-302	AC 220V 6A
THC-302	AC 220V 10A

PHOTO-ELECTIC
LIGHT CONTROL
光敏感應器



Photo-Electic
Light Control
THC-303 25A




欢迎使用THC-303光控传感器!
本产品可以自动根据环境光打开或关闭灯光。环境温度和湿度不能影响它。它不仅方便而且实用,它可以控制负载只在夜间工作。用于公路灯、花园灯等。

Welcome to use THC-303 light-control sensor!
The product can turn on or turn off light automatically according to ambient-light. Ambient temperature and humidity can't affect it. It is not only convenient but also practical; it can control the load working only at night. It is used for road light, garden light etc.

Incorrect
不正确的



Correct
正确的

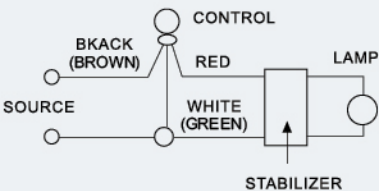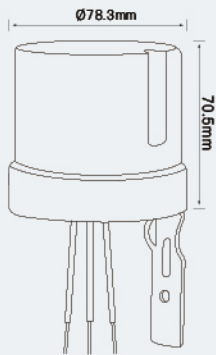

ItemNo	THC-303
Available Ooerating Voltages	110V, 220V, AC 50/60Hz
Load Rating	16A, 20A, 25A
Life Rated Load	5000Operations Minimum
Turn ON/TURN OFF	< 1/5
Time Delay	30 to 120 Seconds (Instant Available)
Temperature Range	-10℃ to +50℃
Power Consumption	< 1W
Dimension	57 × 121 × 53mm
QTY	50
G.W	12.2
N.W	9.2
MEAS	525 × 470 × 185
Photocell	Cds or Siticon Phototransistor
Ambient Light	5-100LUX (adjustable)


ORDER CODE NO	RATING
THC-303	AC 220V 16A
THC-303	AC 220V 20A
THC-303	AC 220V 25A
THC-303	AC 110V 16A
THC-303	AC 110V 20A
THC-303	AC 110V 25A

PHOTO-ELECTRIC
LIGHT CONTROL
光敏感應器

Photo-Electric
Light Control






THC-305-3



THC-305-4

欢迎使用THC-305光控传感器!
本产品可以自动根据环境光打开或关闭灯光。环境温度和湿度不能影响它。它不仅方便而且实用,它可以控制负载只在夜间工作。用于公路灯、花园灯等。

Welcome to use THC-305 light-control sensor!
The product can turn on or turn off light automatically according to ambient-light. Ambient temperature and humidity can't affect it. It is not only convenient but also practical; it can control the load working only at night. It is used for road light, garden light etc.

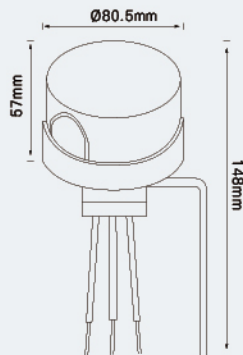

ItemNo	THC-305-3
Available Operating Voltages	110V, 220V, AC 50/60Hz
Load Rating	3A, 6A, 10A
Life Rated Load	5000Operations Minimum
Turn ON/TURN OFF	< 1/5
Time Delay	30 to 120 Seconds (Instant Available)
Temperature Range	-10℃ to +50℃
Power Consumption	< 1W
Dimension	57 × 121 × 53mm
QTY	50
G.W	6.5
N.W	4.2
MEAS	470 × 420 × 200
Photocell	Cds or Sition Phototransistor
Ambient Light	< 5-50LUX (adjustable)

ORDER CODE NO	RATING
THC-305-3	AC 220V 3A
THC-305-3	AC 220V 6A
THC-305-3	AC 220V 10A
THC-305-3	AC 110V 3A
THC-305-3	AC 110V 6A
THC-305-3	AC 110V 10A

PHOTO-ELECTRIC LIGHT CONTROL 光敏感應器



Photo-Electric Light Control

THC-309 10A

THC-309 16A

THC-309 25A

IP44/IP66

欢迎使用THC-309光控传感器!

本产品可以自动根据环境光打开或关闭灯光。环境温度和湿度不能影响它。它不仅方便而且实用,它可以控制负载只在夜间工作。用于公路灯、花园灯等。



Welcome to use THC-309 light-control sensor!

The product can turn on or turn off light automatically according to ambient-light. Ambient temperature and humidity can't affect it. It is not only convenient but also practical; it can control the load working only at night. It is used for road light, garden light etc.

Incorrect
不正确的



Correct
正确的

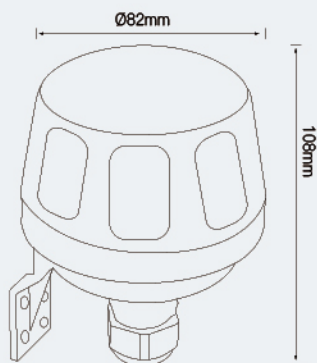

ItemNo	THC-309
Available Operating Voltages	110V, 220V, AC 50/60Hz
Load Rating	3A, 6A, 10A, 16A, 20A, 25A
Life Rated Load	5000Operations Minimum
Turn ON/TURN OFF	< 1/5
Time Delay	30 to 120 Seconds (Instant Available)
Temperature Range	-10℃ to +50℃
Power Consumption	< 1W
Dimension	57 × 121 × 53mm
QTY	50
G.W	12
N.W	9
MEAS	525 × 470 × 180
Photocell	Cds or Sition Phototransistor
Ambient Light	5-100LUX (adjustable)

ORDER CODE NO	RATING
THC-309	AC 220V 3A
THC-309	AC 220V 6A
THC-309	AC 220V 10A
THC-309	AC 220V 16A
THC-309	AC 220V 20A
THC-309	AC 220V 25A
THC-309	AC 110V 3A
THC-309	AC 110V 6A
THC-309	AC 110V10A
THC-309	AC 110V 16A
THC-309	AC 110V 20A
THC-309	AC 110V 25A