

GYD-1M,GYD-2M,JYD-3M Modular Signal Lamp



GYD-1M



GYD-2M



GYD-3M

Application

The Modular Signal Lamp is applicable to circuit with rated voltage 230V~and frequency 50/60Hz for visual indication and signaling.

Technical Data

Construction and Feature

- Low service duration, minimum power consumption
- Compact design in modular size
- Easy installation


Technical Data

Rated voltage	230V AC, 100V AC, 48V AC/DC, 24V AC/DC
Rated frequency	50/60Hz
Colour	GYD-1M Red/Green/Yellow GYD-2M Red/Green GYD-3M Red/Green/Yellow
Connection terminal	Pillar terminal with clamp
Connection capacity	Rigid conductor 2.5mm ²
Installation	On symmetrical DIN rail 35mm

GYD-1M,GYD-2M,GYD-3M Modular Signal Lamp

Max power	0.06W
Illumination	LED
Service duration	30,000 hours

Circuit Diagram

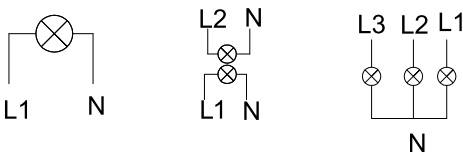

Overall and Installation Dimension(mm)

